

EN-VI50K-70R



Effio-E + 673 CCD With OSD
OSD Button in the cable




Features

- ◆ Weatherproof IR Camera
- ◆ SONY Exview HAD CCD II (ICX672/3AKA)
- ◆ 72 pcs \varnothing 5mm IR-LED, IR Range 50M
- ◆ OSD/2D-DNR/BLC/MD/Privacy Masking
- ◆ 3-Axis Design, easy for installation
- ◆ Built-in 4--9mm Manual Zoom Les



Size Chart

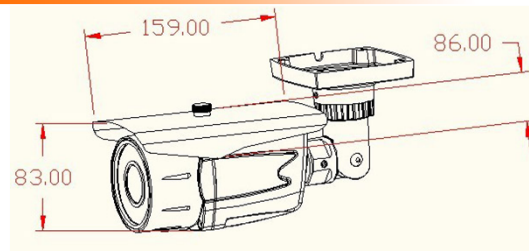

Specifications

| Model Name | EN-VI50K-70 |
|-------------------------|--|
| Image Device | 1/3" Exview HAD CCD II (ICX672/3AKA) |
| DSP Device | Effio-E (CXD4127GG,CXD4816GG) |
| Resolution | Color Mode: 650TVL; B/W Mode:700TVL |
| Picture Elements | PAL:976(H)x582(V) NTSC:976(H)x494(V) |
| IR Led & IR Range | 72pcs \varnothing 5 IR Led; 50M IR Distance |
| Min. Illumination | 0.001 Lux (F2.0)/ 0 Lux IR On |
| Lens Furnished | Built-in 4--9mm Manual Zoom Les (2.8--12mm Optional) |
| TV System | PAL/NTSC |
| Electronic Shutter | NTSC:1/60~1/100,000, PAL:1/50~1/110,000 |
| S/N Ratio | More than 52dB |
| Gamma | 0.45 |
| Exposure | Auto |
| Shuter/ AGC | Auto/Manual |
| White Balance | ATW / User1/User2 |
| Backlight | OFF/ON/BLC/ HLC |
| Pict Adjust | Mirror/Brightness/Contrast/Sharpness/Hue/Gain |
| ATR | ON/OFF |
| Motion Det | OFF/ON(Detect sense/ Area Sel) |
| Peivacy Masking | OFF/ON (4 Zone) |
| Day/Nigh | True Day and Night (Auto/ Day / Night / Ext. D&N) |
| 2D-NR | OFF/ON (Y/C level) |
| Camera ID | OFF/ON |
| Sync. System | Internal |
| Waterproofing Criterion | IP 66 |
| Video Output | 1 Vp-p / 75 Ohms |
| Power Supply | DC12V \pm 10% |
| Operation Temperature | -10 $^{\circ}$ C ~ +50 $^{\circ}$ C RH95% Max |
| Dimension | Body : \varnothing 83x159mm With Bracket: 230(L)x86(W)x83(H) |
| Weight | 1600g |

Design and specifications are subject to change without notice.